

# L4 Series Street/Parking Lot Light

25W to 240W (with CREE LEDs and Meanwell Driver)

CSA, cUL, cETL, or equal

Project Reference: \_\_\_\_\_ Fixture Type: \_\_\_\_\_ Cat. No.: \_\_\_\_\_ Voltage: \_\_\_\_\_ Options: \_\_\_\_\_



## SPECIFICATIONS

- Ideal for roadways, parking lots, and walkway applications
- Power: 25W to 240W; Voltage: 110-277V or 347-480V
- Meanwell drivers except for 347-480V 240W fixture which has an Inventronics driver
- Lumens: 2,825 to 26,806 lm; CCT: 4000K, 5000K, 5700K
- Working temp: -35°C to +40°C
- CRI: >70; IP Rating: IP65
- Power Factor: >0.9
- Lifetime: 50,000 hours at 70% lumen maintenance
- Body: rust-free aluminum alloy with 2 mm powder coat

## ORDERING INFORMATION

Model	Voltage	Optional Photocell	Wattage	CCT	Distribution Type	0-10V Dimming	Body Colour
L401	L = 110-277V H = 347-480V	C	25W	40K = 4000K	T2 = Type II		BR = Brown
			40W				
			65W				
L402	L = 110-277V	C	80W	50K = 5000K	T3 = Type III	10	GR = Grey
			100W				
L403	L = 110-277V H = 347-480V	C	120W	57K = 5700K	T5 = Type V		BL = Black
			180W				
L404	L = 110-277V H = 347-480V	C	150W				WH = White
			240W				

Ex. L403L-120W-50K-T2-10-GR


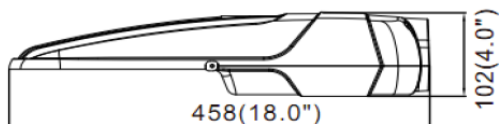
**Notes:** Fixtures mount on standard 2.375" OD tenon  
 347-480V only available in 65W, 120W, 150W, 180W, & 240W  
 All configurations except 65W 347-480V are DLC listed

# L4 Series Street/Parking Lot Light


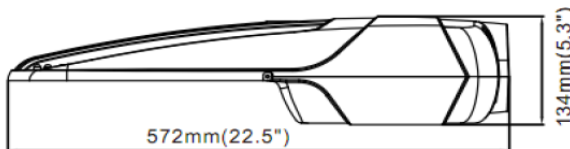
25W to 240W (with CREE LEDs and Meanwell Driver)

CSA, cUL, cETL, or equal

MODEL	LEDS	LED CURRENT	SYSTEM WATTS	DIST TYPE	40K (4000K, 70 CRI)					57K (5700K, 70 CRI)				
					LUMENS	B	U	G	LPW	LUMENS	B	U	G	LPW
L401	10	0.7A	25W	T2	2825	1	0	1	113	3201	1	0	1	128
				T3	2866	1	0	1	115	3225	1	0	1	129
				T5	2824	2	0	2	113	2906	2	0	2	116
	16	0.75A	40W	T2	4852	1	0	1	121	5260	2	0	2	132
				T3	4706	1	0	1	118	5028	1	0	1	126
				T5	4744	3	0	3	119	4931	3	0	3	123
		1.15A	65W	T2	6714	2	0	2	103	7624	2	0	2	110
				T3	6889	2	0	2	106	7545	2	0	2	113
				T5	6683	3	0	3	103	6962	3	0	3	109


 EPA: 0.05m<sup>2</sup>  
 (0.5 ft<sup>2</sup>)  
 Weight: 4.0 kgs  
 (8.8 lbs)

MODEL	LEDS	LED CURRENT	SYSTEM WATTS	DIST TYPE	40K (4000K, 70 CRI)					57K (5700K, 70 CRI)				
					LUMENS	B	U	G	LPW	LUMENS	B	U	G	LPW
L403	48	0.7A	120W	T2	13168	3	0	3	110	13780	3	0	3	115
				T3	13251	3	0	3	110	13706	3	0	3	114
				T5	13748	3	0	0	115	14181	4	0	1	118
	1.0A	180W	T2	18542	3	0	3	103	19801	3	0	3	110	
			T3	17989	3	0	3	100	19220	3	0	3	107	
			T5	18492	4	0	1	103	19946	4	0	1	111	
L404	64	0.7A	150W	T2	16984	3	0	3	113	18444	3	0	3	123
				T3	17437	3	0	3	116	18252	3	0	3	122
				T5	17148	4	0	1	114	18495	4	0	1	123
	1.0A	240W	T2	24376	3	0	3	102	26375	4	0	3	110	
			T3	24837	3	0	3	103	25914	3	0	3	108	
			T5	24473	5	0	1	102	26806	5	0	1	112	


 EPA: 0.08m<sup>2</sup>  
 (0.8 ft<sup>2</sup>)  
 Weight: 6.5 kgs  
 (14.5 lbs)

## Optional Brackets:



A11 (adjustable)



A05



A06



A10