


Project Reference: _____ Fixture Type: _____ Cat. No.: _____ Voltage: _____ Options: _____



Shown with clear lens

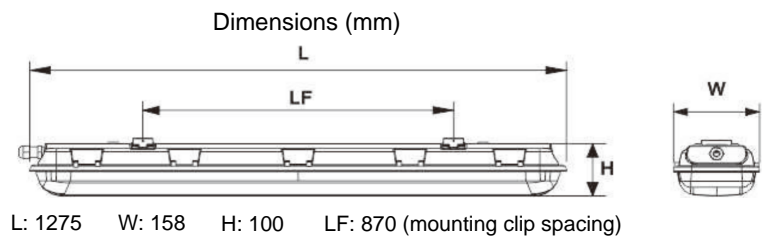

SPECIFICATIONS

- Ideal luminaire for industrial use and parking garages (7-16' ceilings)
- Completely weather and dust proof – IP66 gasketed
- Easy maintenance – simply wipe off
- Instant-on security applications
- High colour rendering provides better vision
- Wide distribution and laterally prismatic lens optimized for efficiency and performance
- Fiberglass housing
- SAE 316 stainless steel lens holding clips
- Electrical: input volts 120-277V AC; frequency 50-60 Hz
- Environmental: operating humidity 10-95% RH; operating temperature -0 C to +40 C

ORDERING INFORMATION

Product Code	Wattage	Lamps	Lumens
1X4MP-1LID18-UNV-__ __*	17	1 x T8 LED tube with internal driver	1700
1X4MP-2LID18-UNV-__ __*	33	2 x T8 LED tubes with internal drivers	3300
1X4MP-3LID18-UNV-__ __*	50	3 x T8 LED tubes with internal drivers	5000

* Use "CL" for clear lens or "FL" for frosted lens

OPTIONS/ACCESSORIES

Product Code	Description
-40K	Standard is 5000K LED lamps; for optional 4000K LED lamps, add suffix "-40K" to above product code
347	For 347V option, replace "UNV" in product code above with "347" (internal step-down transformer)
-SR	Add "- SR" to product code above for internal microwave occupancy sensor with on/off and optional photocell control
OSFHU-1TW	Leviton passive infrared occupancy sensor 120-347V (external, mounted at one end)
WHYTG-10	10' aircraft cable quick hanging kit