


XLED- Series



CCT selectable LED Downlights with Junction Box

CSA, cUL, cETL, or equal

Project Reference: _____ Fixture Type: _____ Cat. No: _____ Voltage: _____ Options: _____

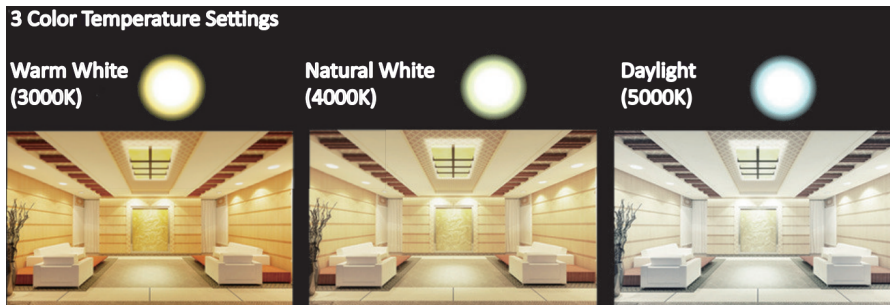

Total cable length = 12"

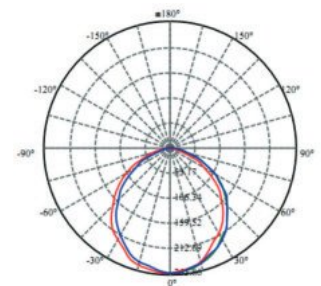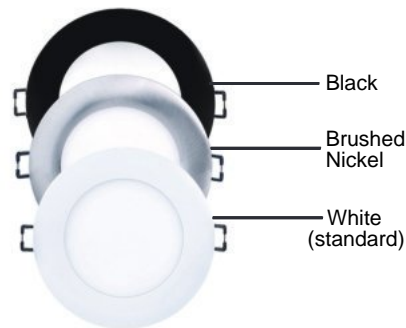

This CCT selectable, slim LED downlight is easy to install. No recessed housing is required. It fits almost anywhere and is the perfect choice if you have joists or duct work in the way. Air tight and rated for direct contact with insulation, it's an excellent choice for soffits, drop ceilings, or any general lighting applications.

Toggle switch on connection box to choose from CCT 3000K, 4000K, or 5000K

Triac 120V dimmable, ETL listed driver is inside connection box, no other junction box needed

Type IC rated, no housing required, direct contact with insulation allowed


Aluminum housing with white powder coat finish

Maintenance free, rated life over 50,000 hours

Suitable for -20 C to 40 C ambient temperatures

Energy Star, cETLus, damp location rated

110 beam angle, CRI > 80, 110-130VAC input

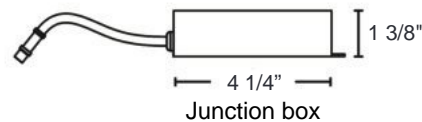

ORDERING INFORMATION						
Product Code	Watts	Lumens	CCT	Downlight Dims	Trim Colour	Cutout
XLED4-9W-120V-WH	9W	589/704/673 lm	3000/4000/5000K	OD: 4 3/4" x 1.1"	White	4"
XLED6-15W-120V-WH	15W	990/1186/1052 lm	3000/4000/5000K	OD: 6 3/4" x 1.1"	White	6 1/4"
-BL (for optional black trim ring cover, replace suffix WH with BL)						
-NK (for optional brushed nickel trim ring cover, replace suffix WH with NK)						